



5719

**HIGH-MU TRIODE**

SUBMINIATURE TYPE

*Intended for applications where dependable performance  
under shock and vibration is paramount.*

**5719**  
**PREMIUM TYPE**

**GENERAL DATA****Electrical:**

Heater, for Unipotential Cathode:

Voltage . . . . . 6.3  $\pm$  5% . . . . . ac or dc volts

Current . . . . . 0.150 . . . . . amp

Direct Interelectrode Capacitances:

	With Exter- nal Shield <sup>0</sup>	Without Exter- nal Shield	
Grid to Plate . . . . .	0.8	0.8	$\mu\mu\text{f}$
Input . . . . .	1.9	1.7	$\mu\mu\text{f}$
Output . . . . .	2.2	0.6	$\mu\mu\text{f}$

<sup>0</sup> Having inside diameter of 0.405" and connected to cathode.**Characteristics, Class A<sub>1</sub> Amplifier:**

Plate Supply Voltage . . . . . 100 . . . . . 150 volts

Cathode Resistor . . . . . 1500 . . . . . 680 ohms

Amplification Factor . . . . . 70 . . . . . 70

Plate Resistance . . . . . 41000 . . . . . 30500 ohms

Transconductance . . . . . 1700 . . . . . 2300  $\mu\text{mhos}$ 

Plate Current . . . . . 0.73 . . . . . 1.85 ma

Grid volts (Approx.)

for plate current

of 10  $\mu\text{amp}$  . . . . . -2.5 . . . . . -3.8 volts**Mechanical:**

Operating Position . . . . . Any

Maximum Bulb Length . . . . . 1-3/8"

Length from Button Seal to Bulb Top  
(Excluding tip) . . . . . 1.075"  $\pm$  0.060"Diameter . . . . . 0.383"  $\pm$  0.017"

Bulb . . . . . T-3

Leads, Flexible . . . . . 8


Length . . . . . 1-1/2" to 1-3/4"

Orientation and Diameter . . . . . See Dimensional Outline  
in GENERAL SECTION**BOTTOM VIEW**

Lead No.1-Grid

Lead No.2-No  
Conn.

Lead No.3-Heater

Lead No.4-No  
Conn.

Lead No.5-Cathode

Lead No.6-Heater

Lead No.7-No  
Conn.

Lead No.8-Plate

**AMPLIFIER - Class A<sub>1</sub>****Maximum Ratings, Absolute Values:**

PLATE VOLTAGE . . . . . 165 max. volts

JUNE 1, 1953

**TUBE DEPARTMENT**  
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

TENTATIVE DATA 1

5719



5719

# HIGH-MU TRIODE

GRID VOLTAGE . . . . .	-55 max.	volts
PLATE CURRENT . . . . .	3.3 max.	ma
PLATE DISSIPATION . . . . .	0.55 max.	watt
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode . . . . .	200 max.	volts
Heater positive with respect to cathode . . . . .	200 max.	volts
BULB TEMPERATURE (At hottest point on bulb surface) . . . . .	250 max.	°C

## Typical Operation as Resistance-Coupled Amplifier:

See RESISTANCE-COUPLED AMPLIFIER CHART  
at end of tabulated data for this type

## Maximum Circuit Values:

### Grid-Circuit Resistance:

For cathode-bias operation . . . . .	1.2 max.	megohms
For fixed-bias operation . . . . .	Not recommended	

## CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN\*

	Note	Min.	Max.	
Heater Current . . . . .	1	0.138	0.162	amp
Grid-to-Plate Capacitance . . . . .	2	0.6	1.0	μf
Input Capacitance . . . . .	2	1.2	2.2	μf
Output Capacitance . . . . .	2	0.4	0.8	μf
Amplification Factor . . . . .	1,3	60	80	
Plate Current . . . . .	1,3	0.5	0.9	ma
Plate Current . . . . .	1,4	-	50	μamp
Transconductance . . . . .	1,3	1400	2000	μmhos
Transconductance . . . . .	5,3	1300	-	μmhos
Grid Current . . . . .	1,6	-	±0.3	μamp
Heater-Cathode Leakage Current:				
Heater negative with respect to cathode . . . . .	1,7	-	7.0	μamp
Heater positive with respect to cathode . . . . .	1,7	-	7.0	μamp
Leakage Resistance:				
Between Grid and All Other Electrodes Tied Together . . . . .	1,8	100	-	megohms
Between Plate and All Other Electrodes Tied Together . . . . .	1,9	100	-	megohms

\* Each tube is stabilized before characteristics testing by continuous operation for at least 45 hours at room temperature and with dissipation values equivalent to life test conditions.

Note 1: With 6.3 volts ac or dc on heater.

Note 2: Without external shield.

Note 3: With plate supply voltage of 100 volts, cathode resistor of 150 ohms, and cathode bypass capacitor of 1000 microfarads.

JUNE 1, 1953

TUBE DEPARTMENT

TENTATIVE DATA 1

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY



5719

5719

## HIGH-MU TRIODE

Note 4: With dc plate voltage of 100 volts, and dc grid voltage of -2.5 volts.

Note 5: With 5.7 volts ac or dc on heater.

Note 6: With plate supply voltage of 100 volts, cathode resistor of 1500 ohms, cathode bypass capacitor of 1000 microfarads and grid resistor of 0.1 megohm.

Note 7: With 100 volts dc between heater and cathode.

Note 8: With grid 100 volts negative with respect to all other electrodes tied together.

Note 9: With plate 300 volts negative with respect to all other electrodes tied together.

## SPECIAL RATINGS &amp; PERFORMANCE DATA

## Shock Rating:

Impact Acceleration . . . . . 450 max. g

Tubes are held rigid in three different positions in a Navy Type, High Impact (flyweight) Shock Machine and are subjected to 450 g impact acceleration.

## Fatigue Rating:

Vibrational Acceleration . . . . . 2.5 max. g

Tubes are rigidly mounted and subjected in each of three positions to 2.5 g vibrational acceleration at 25 cycles per second for 32 hours.

Uniform Acceleration Rating: . . . . . 1000 max. g

Tubes are subjected in each of three positions to a gradually applied uniform acceleration up to 1000 g.

## Low-Frequency Vibration Performance:

RMS Output Voltage . . . . . 25 max. mv

Under the following conditions: A 150-volt plate voltage supply having an impedance not exceeding that of a 40  $\mu$ f capacitor, plate load resistance of 10000 ohms, grid resistor of 0.1 megohm, cathode resistor of 1500 ohms, cathode bypass capacitor of 1000  $\mu$ f, and vibrational acceleration of 15 g at 40 cps.

## Heater-Cycling Life Performance:

Cycles of Intermittent Operation . . . . . 2500 min. cycles

Under the following conditions: With heater voltage of 7.0 volts cycled 1 minute on and 4 minutes off, heater-cathode voltage of 140 volts (rms), and plate and grid voltage = 0 volts.

## Average Life Performance:

The average life performance based on a 500-hour test at 175°C ambient temperature is not less than 450 hours. This life test is made on sample lot of tubes with heater voltage of 6.3 volts; plate supply voltage of 100 volts; dc heater-cathode voltage (heater positive with respect to cathode) of 200 volts; cathode resistor of 1500 ohms; and grid resistor of 1 megohm.

The 500-hour end-point limits for the 5719 with heater voltage of 6.3 volts, plate supply voltage of 100 volts, cathode resistor of 680 ohms bypassed by capacitor having a maximum reactance of 3 ohms, and dc heater-cathode voltage of 100 volts with heater either positive or negative with respect to cathode are: transconductance, 1000 micromhos minimum; heater-cathode leakage current, 20 microamperes maximum; and grid current, +0.9 microampere maximum or -0.9 microampere maximum.

JUNE 1, 1953

TUBE DEPARTMENT

TENTATIVE DATA 2

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

5719



5719

## HIGH-MU TRIODE

## OPERATING CONDITIONS AS RE-

## Cathode-Bias

	100				
	0.1	0.1	0.27	0.27	0.47
Plate Supply Voltage	0.27	0.47	0.47	1.0	0.47
Plate Load Resistor	2700	2700	5600	6800	10000
Grid Resistor <sup>o</sup>	0.1	0.1	0.1	0.1	0.1
Cathode Resistor	3.7	3.9	4.1	4.2	3.95
Signal Input Volts (rms)	37	39	41	42	39.5
Output Volts (rms)	2.4	2.1	2.1	1.8	2.4
Gain <sup>A</sup>	0.20	0.20	0.20	0.26	0.20
Distortion	7.3	7.7	8.1	10.7	7.8
Signal Input Volts (rms)*	36.5	38.5	40.5	41.2	39
Output Volts (rms)	5.0	4.5	4.3	4.9	5.0
Gain <sup>A</sup>					
Distortion					

## Zero-Bias

	100				
	0.1	0.1	0.27	0.27	0.47
Plate Supply Voltage	0.27	0.47	0.47	1.0	0.47
Plate Load Resistor	0.1	0.1	0.1	0.1	0.1
Grid Resistor <sup>o</sup>	3.8	4.0	4.3	4.55	4.2
Signal Input Volts (rms)	38	40	43	45.5	42
Output Volts (rms)	2.2	2.0	1.9	1.6	2.1
Gain <sup>A</sup>	0.2	0.21	0.22	0.26	0.2
Distortion	7.25	7.9	8.95	11	7.9
Signal Input Volts (rms)*	36.2	37.6	40.6	42.4	39.5
Output Volts (rms)	5.0	4.8	4.9	4.8	4.8
Gain <sup>A</sup>					
Distortion					

Note 1: Coupling capacitors should be selected to give desired frequency response. Cathode resistor should be adequately bypassed.

<sup>o</sup> of following stage.

JUNE 1, 1953

TUBE DEPARTMENT  
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

TENTATIVE DATA 2



5719

5719

## HIGH-MU TRIODE

## RESISTANCE-COUPLED AMPLIFIER

## Operation

200							volts
0.47	0.1	0.1	0.27	0.27	0.47	0.47	megohm
1.0	0.27	0.47	0.47	1.0	0.47	1.0	megohm
10000	1500	1800	3300	3900	5600	6800	ohms
0.1	0.1	0.1	0.1	0.1	0.1	0.1	volt
4.3	4.4	4.6	4.9	5.0	4.8	5.0	volts
43	44	46	49	50	48	50	
1.7	0.7	0.7	0.9	0.7	0.9	0.7	per cent
0.25	0.51	0.61	0.50	0.59	0.49	0.64	volt
10.7	22	27	24.2	29	23.2	31.6	volts
42.8	43.1	44.3	48.4	49.2	47.3	49.4	
4.5	3.9	5.0	4.5	4.5	5.0	5.0	per cent

## Operation

200							volts
0.47	0.1	0.1	0.27	0.27	0.47	0.47	megohm
1.0	0.27	0.47	0.47	1.0	0.47	1.0	megohm
0.1	0.1	0.1	0.1	0.1	0.1	0.1	volt
4.55	4.7	4.9	5.35	5.4	5.2	5.4	volts
45.5	47	49	53.5	54	52	54	
1.6	0.4	0.4	0.8	0.7	0.9	0.7	per cent
0.27	0.59	0.63	0.54	0.65	0.5	0.63	volt
11.3	25	27.7	25.8	31.5	23.5	30.5	volts
41.8	42.4	43.9	47.7	48.5	47	48.4	
5.0	4.9	5.0	4.9	5.0	5.0	4.8	per cent

\* Maximum value to swing the grid of resistance-coupled amplifier tube to the point where its grid starts to draw current.

▲ Ratio of signal output to signal input.

JUNE 1, 1953

TUBE DEPARTMENT  
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


TENTATIVE DATA 3

5719



5719

# AVERAGE PLATE CHARACTERISTICS

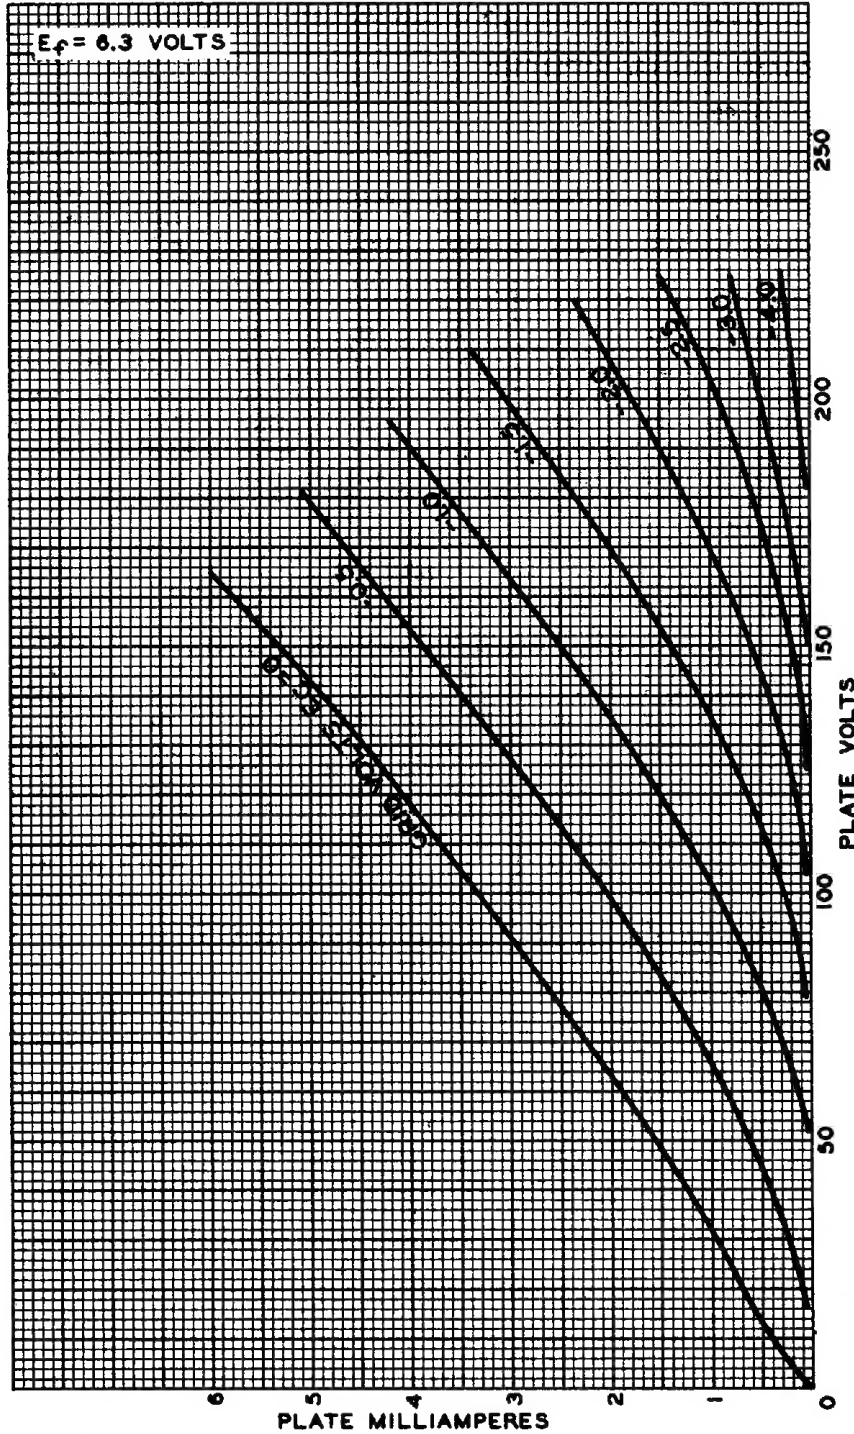


FEB. 16, 1953

TUBE DEPARTMENT  
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-7925

AVERAGE CHARACTERISTICS

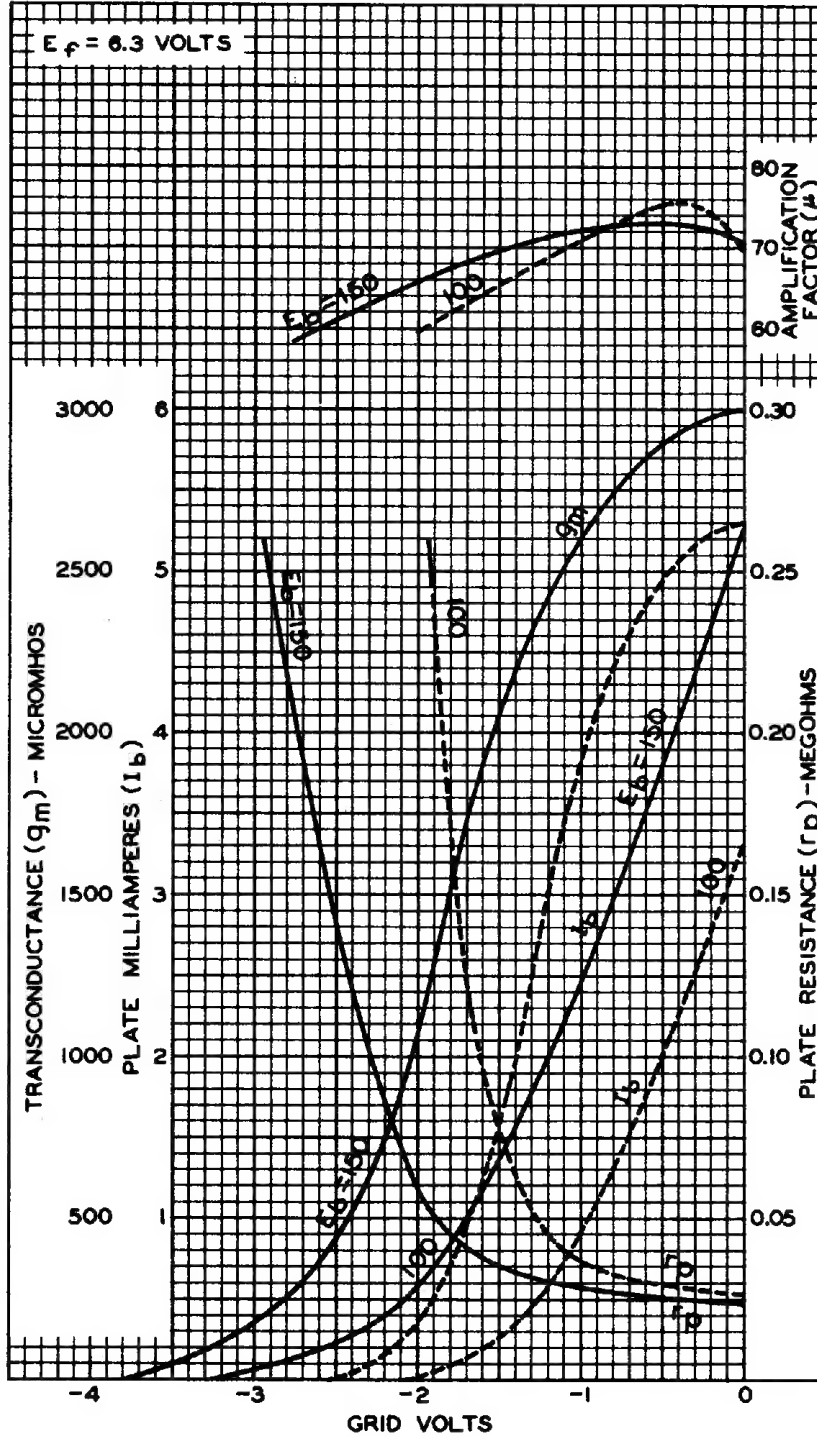

FEB. 16, 1953

TUBE DEPARTMENT  
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-7926